

# GLASS TUBE ROTAMETER



## Specifications

D N (mm)	Model	Measure		Working pressure (Mpa)	Temp.
		Water(L/h)	Air(m <sup>3</sup> /h)		
15	RRT100T - 15	4-40	0.12-1.2	≤1.0	-20°C ~120°C
		6-60	0.3-3		
		10-100	0.5-5		
		16-160	0.8-8		
		25-250	1.2-12		
		40-400	2-20		
25	RRT100T - 25	63-630	2-20	≤1.0	-20°C ~120°C
		100-1000	3-30		
		160-1600	5-50		
		250-2500	8-80		
40	RRT100T - 40	160-1600	5-50	≤0.9	-20°C ~120°C
		250-2500	8-80		
		400-4000	12-120		
50	RRT100T - 50	400-4000	12-120	≤0.7	-20°C ~120°C
		630-6300	20-200		
		1000-10000	30-300		
		5000-16000			


## Sizes

D N (mm)	Pipe thread connection				
	Window size axb	L2	A	Thread	Weight(Kg)
15	33x235	375	58	1/2"G, 3/8"G, 1/2"NPT*	1.1
25	50x240		74	1"G, 3/4"G, 1"NPT*	1.8
40	65x235		92	1 1/2"G, 1 1/2"NPT*	3.1
50	85x230		112	2"G, 2"NPT*	5.1

## Material

No.	Material	No.	Material
1	304SS, 316L, PTFE	4	304SS, PTFE
2	Al.	5	304SS, Al.
3	Al.	6	304SS, 45#

## How to order

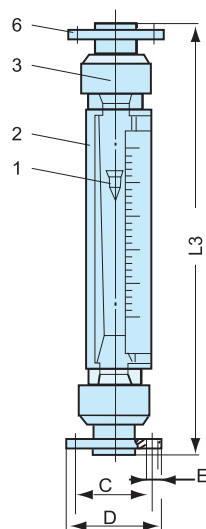

Unit:mm

